

INSTANT HEAT FOR DIRECT DRIVE AND HIGH VELOCITY FANS

- Up To 300 °C Peak Outlet Temperature
- Output 1 to 12 kW
- Single Or Three Phase
- No Maintenance
- Stainless Steel Casing with Cool Touch Insulated Outer Jacket
- Temperature Controls Available
- Compatible with Fan and Blower Range
- UL Approved





Product supplied may differ from image based on requested requirements. Image represents Model 632 Process Heater (casing / element).


Electrical
415 V - 380 V - 3 Phase
220 V - 240 V - 1 Phase
Other Voltages Available with Limited Loading

Maximum Outlet Temperature: 300°C
Resistance to Airflow (approx.)
0.43" w.g. at 100 ft ³ p/min
1.70" w.g. at 200 ft ³ p/min
10.30" w.g. at 500 ft ³ p/min

PERFORMANCE CURVE

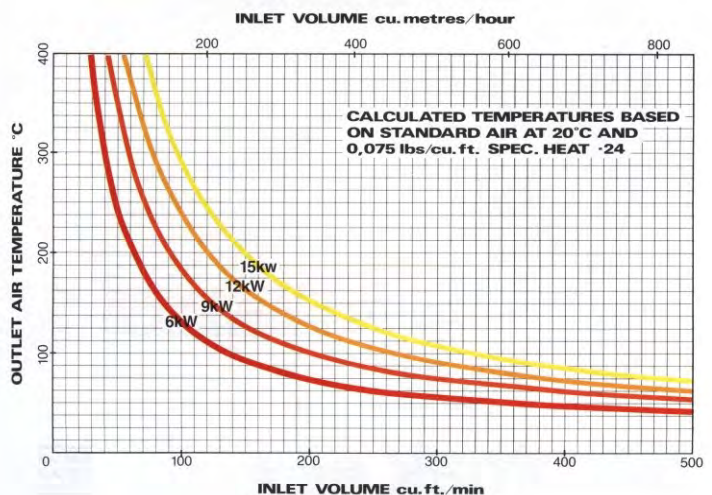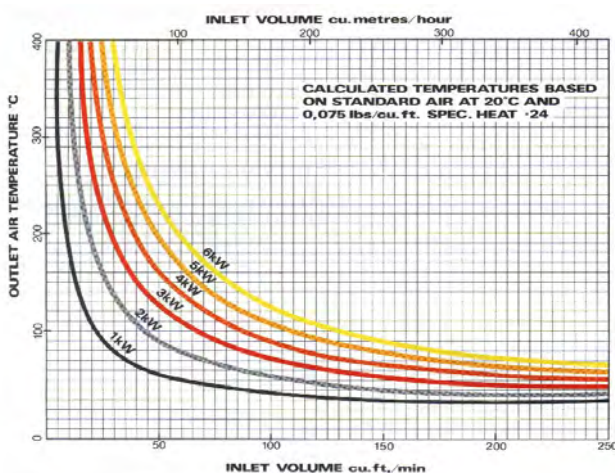

DIMENSIONAL DRAWING: Model 632

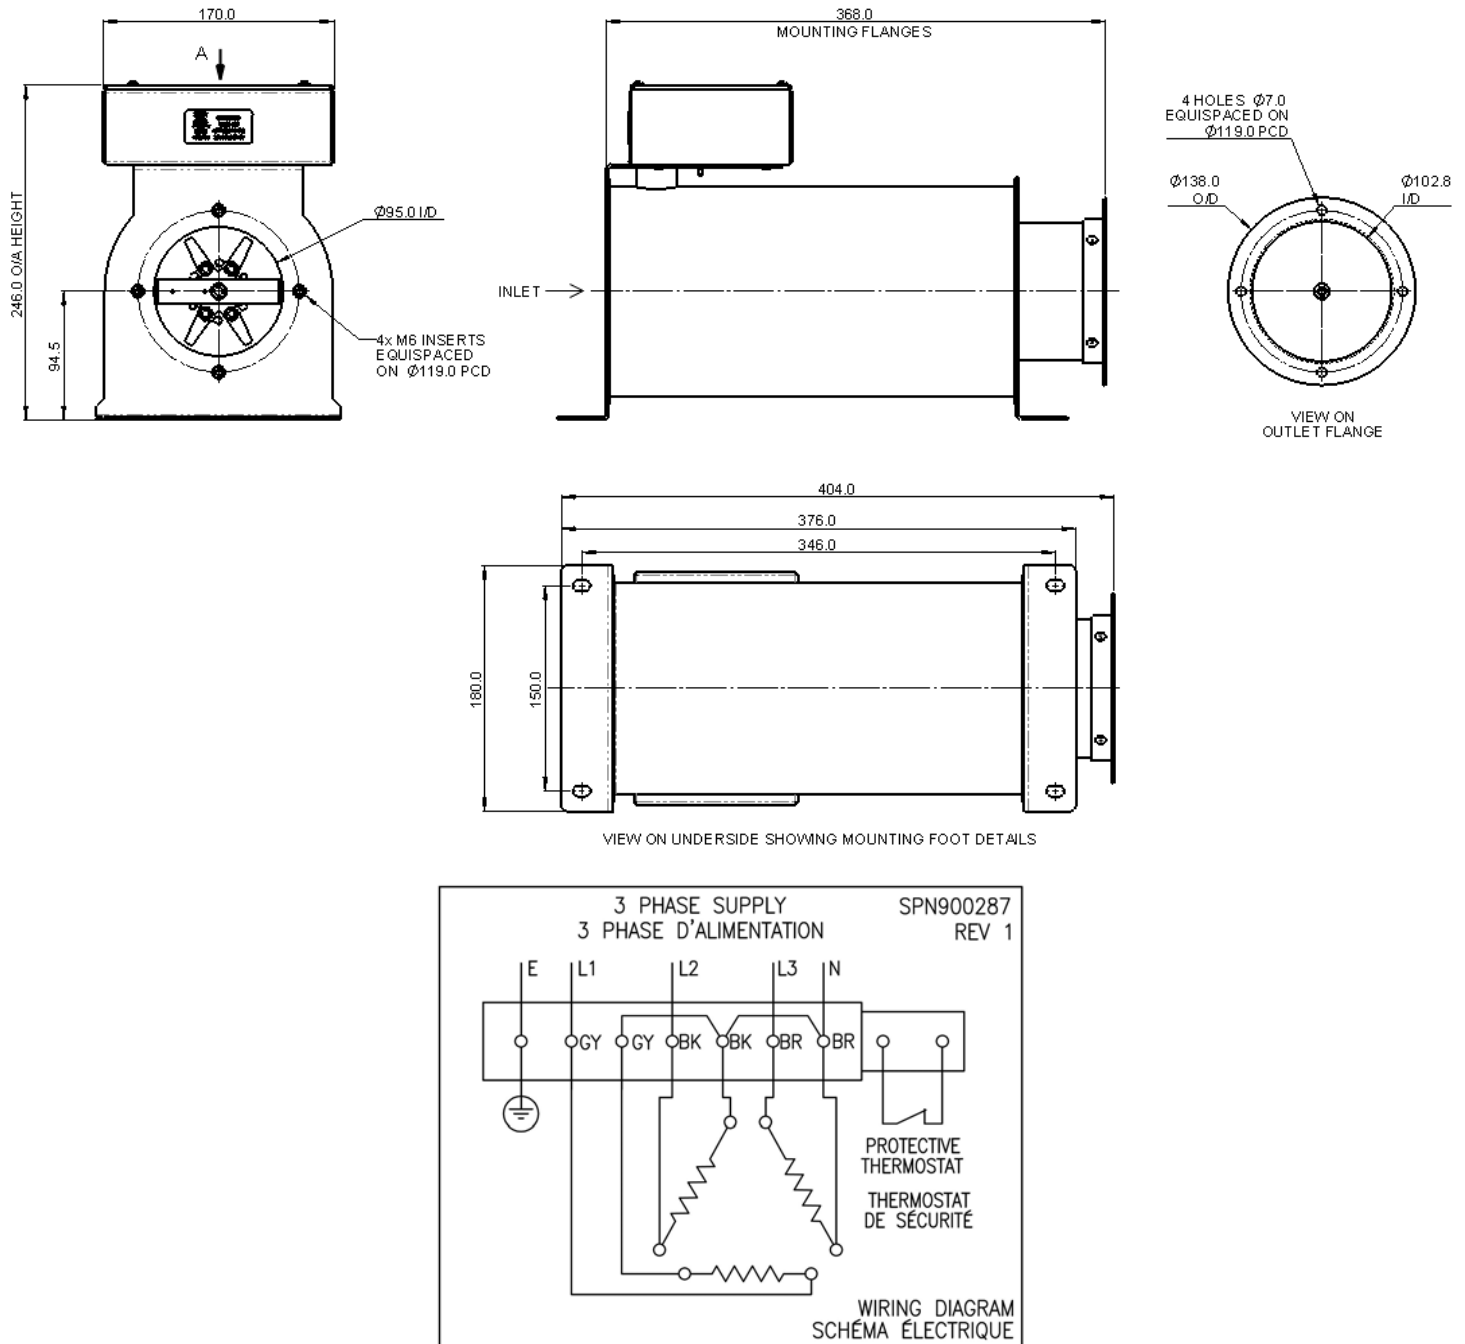

All dimensions in mm