

## Model 571/3

INSTANT HEAT FOR DIRECT DRIVE AND HIGH VELOCITY FANS

### FEATURES AND BENEFITS


- Up To 300 °C Peak Outlet Temperature
- 5 kW output
- 230 - 250 V
- Single Or Three Phase
- Single Heater Cartridge with up to 3 Elements (3ph)
- No Maintenance
- Stainless Steel Casing
- Direct Fit with DD573 Fan and Compatible with Fan and Blower Range



Product supplied may differ from image based on requested requirements. Image represents Model 571/4 Process Heater (casing / element).


### MAXIMUM OUTLET TEMPERATURE: 300 C

- Resistance to Airflow (approx)
  - 1.2 mbar at 68m<sup>3</sup>/hr
  - 8.2 mbar at 169.9m<sup>3</sup>/hr
  - 18.4 mbar at 255m<sup>3</sup>/hr

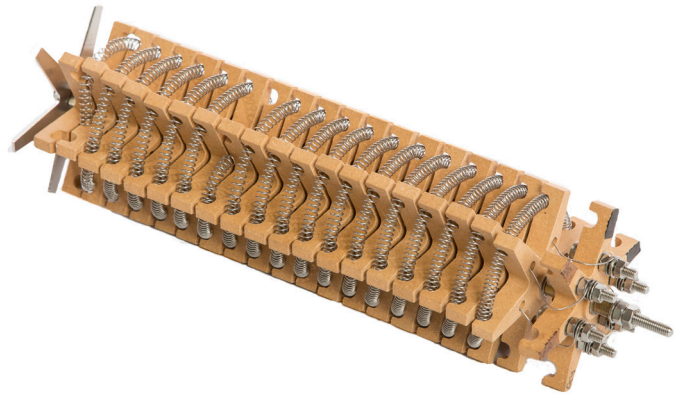

PROCESS AIR HEATER

### PERFORMANCE CURVE

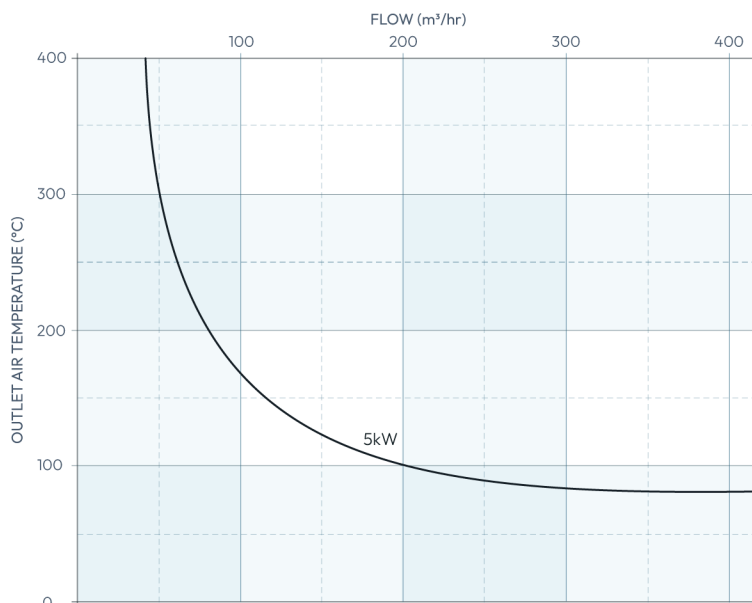


Temperatures calculated based on standard air at 20°C & 1.204 kg/m<sup>3</sup> (NTP)

## Model 571/5

DIMENSIONAL DRAWING

PROCESS AIR HEATER

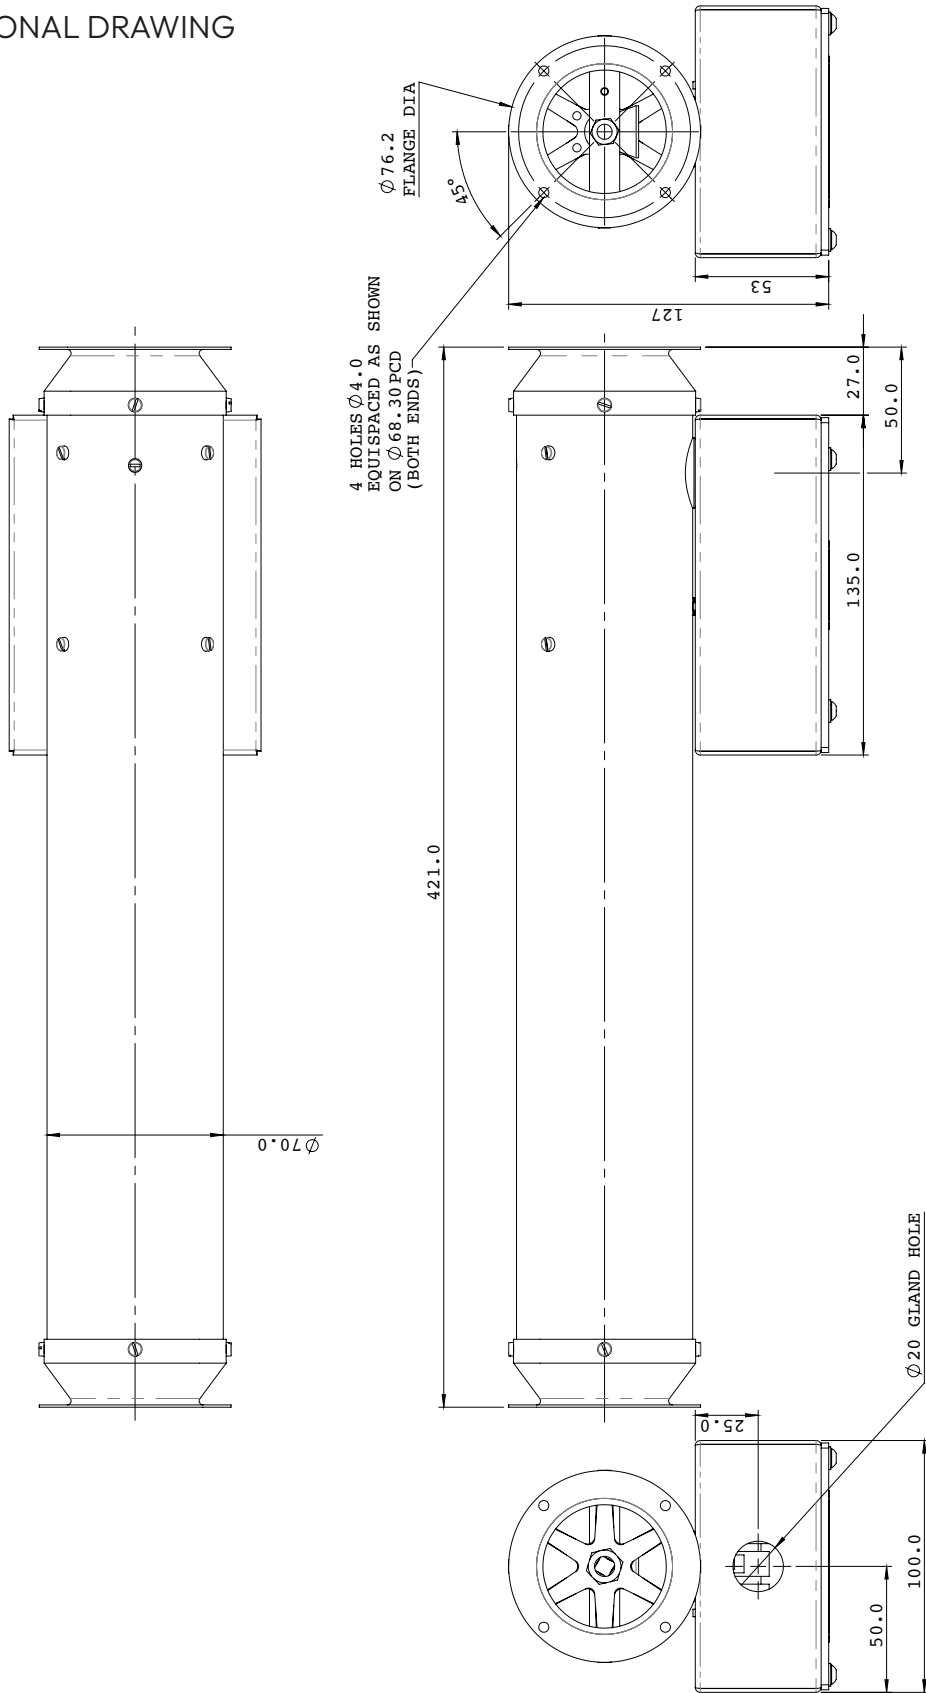

All dimensions in mm